Wyse® X class™ mobile cloud clients

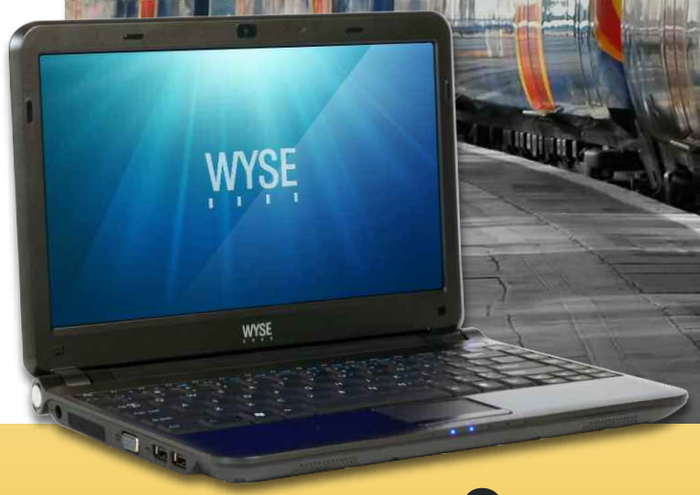

Secure, accessible cloud client computing... has arrived

Wyse X class: All you need to know. Here.

Introducing the Wyse X class mobile cloud clients

Now you can get all of the security you crave – with all the access you need. Wherever you choose to work.

Choose from two equally slim-line versions; the new Wyse X50c, X90cw and X90c7 mobile thin clients or X00c mobile cloud PC with their compact 11.6” LED backlit displays, and the Wyse X50L, X90LW and X90LeW mobile thin clients with stunning 15.4” widescreen displays - ideal for presenting rich multimedia.

Featuring the power of Microsoft Windows XP Embedded, Windows Embedded Standard 2009, Windows Embedded Standard 7 (Wyse X class C Family only) the security and flexibility of Wyse Enhanced SUSE Linux and the cloud PC benefits of Wyse WSM.

Here’s the full range pictured below:

Wyse X50c
The security of Wyse Enhanced SUSE Linux in a compact mobile thin client

Wyse X90cw
Small form factor, high performance mobile thin client with Microsoft Windows Embedded Standard 2009.

Wyse X90c7
Harnesses the rich user experience of new Microsoft Windows Embedded Standard 7 in a compact mobile form factor.

Wyse X00c
All the benefits and power of a Wyse desktop cloud PC in compact mobile form with Wyse WSM.

Wyse X50L
15.4" screen mobile thin client with Wyse Enhanced SUSE Linux.

Wyse X90L
15.4" screen mobile thin client with Windows XP Embedded.

Wyse X90Le
15.4" screen mobile thin client with Windows XP Embedded. Built-in smartcard reader and BlueTooth networking.

Wyse X90LW
15.4" screen mobile thin client with Windows Embedded Standard 2009.

Wyse X90LeW
15.4" screen mobile thin client with Windows Embedded Standard 2009. Built-in Smartcard reader and BlueTooth networking.

Features Wyse X class mobile cloud clients

Wyse X class mobile thin clients feature all the benefits of the Wyse Cloud Client Computing range - including the absence of hard drives. A vital benefit for mobile workers who regularly work with sensitive data in insecure environments. Equipped with a Wyse X class they remain both productive and mobile - with all their data safely stored and accessed from secure virtual desktop servers - eliminating the risk of data-loss from stolen or mislaid laptops.

Learn more:
Simply click the Wyse X class feature icons below.

Performance

X class C Family Connectivity

X class L Family Connectivity

Green

Cloud PC Provisioning

Wyse WSM

Thin Client Management

Wyse WDM™

User Experience Optimization

User Experience Acceleration

Wyse Enhanced SUSE Linux

Microsoft Windows XP Embedded

Microsoft Windows Embedded 2009

Microsoft Windows Embedded Standard 7

Visit: wyse.com

Take a tour of the Wyse X class range features here

Performance Secure. Accessible. Fast mobile cloud clients

The Wyse X class mobile cloud clients feature high-performance energy conserving processors: Intel Atom Z520 in the Wyse X class C Family and Via C7-M ULV in the X class L Family, giving your mobile users all the processing power and flexibility they need including rich multimedia playback.

Choose between the Wyse X class C Family with a crisp 11.6" widescreen display, and the Wyse X class L Family with their larger 15.4" widescreen displays. Both delivering excellent on-screen performance for graphics applications and multimedia presentations.

No hard drives. No worries.
Their hard drive-free design contributes to a far longer lifespan than other comparative laptops. And of course no hard drive means no data whatsoever is lost or compromised if a Wyse X class is stolen or mislaid.

Finally, everything's encased in slim, robust designs ideal for today's hard working and pressurized mobile workers.

Intel Atom Z520 1.33GHz processor

Intel's smallest and lowest power processor to date, the Intel® Atom™ processor has been specifically designed for the new wave of compact, lightweight, high performance mobile cloud clients like the Wyse X class C Family.

VIA C7-M ULV 1.2GHz processor

With its extreme power efficiency for full computing on the go, the VIA C7-M ULV processor has been specifically designed for next generation mobile thin clients such as the Wyse X class L Family.

Continue tour

X class C Family Connectivity

Wyse X50c, X90cw and X90c7 mobile thin clients and X00c mobile cloud PC

Built-in 1.3 Mega Pixel Camera and Microphone*

Well connected

Integrated wireless 802.11 b/g/n

One VGA-type video output

Two USB 2.0 ports

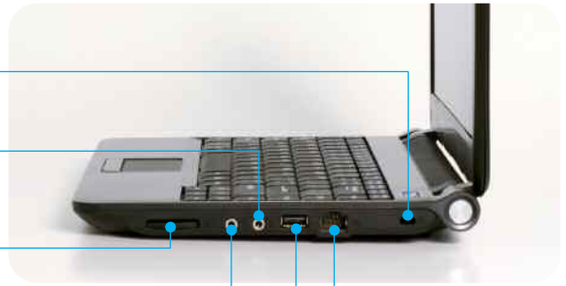

Kensington Lock Slot

Audio In: 1/8-inch mini jack,
8 bit stereo microphone

Media slot 4-in-1 (MS/MS-Pro/SD/MMC) for additional storage

Audio Out: 1/8-inch mini jack, full 16 bit stereo

One USB 2.0 port

10/100 Base-T Ethernet port

Continue tour

* Camera and bluetooth option are currently not supported on X50c.

X class L Family Connectivity

Wyse X50L, X90L, X90Le, X90LW and X90LeW mobile thin clients

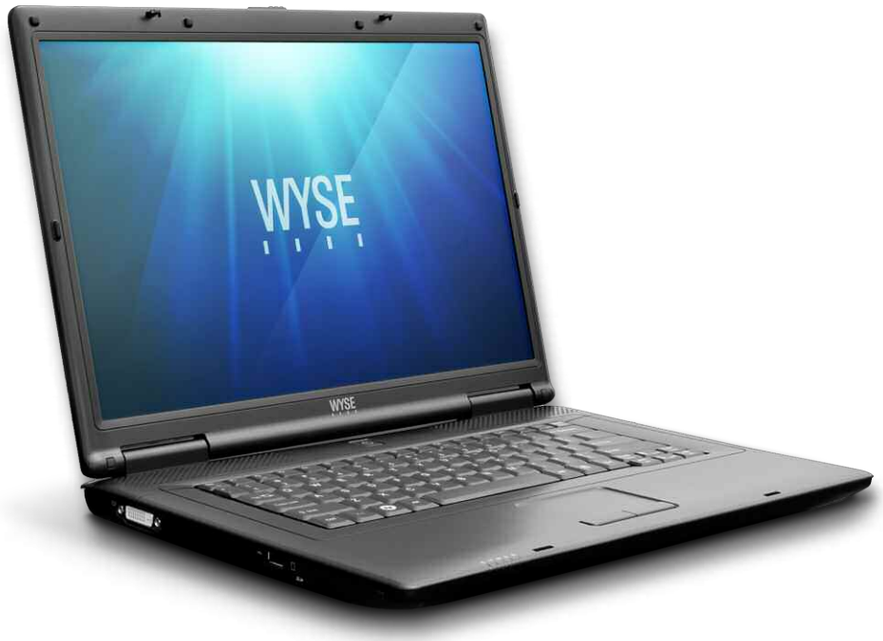

Well connected

Built-in WiFi 802.11 b/g/n

Audio Out: 1/8-inch mini jack, 16 bit stereo
Internal mono speaker

Audio In: 1/8-inch mini jack,
8 bit stereo microphone

Three External USB 2.0 ports (right)

Kensington Lock Slot

One DVI-D Port

10/100/1000 Base-T Gigabit Ethernet port

One external
USB 2.0 port (left)

One VGA-type video output

SD Card Slot

ExpressCard slot

Continue tour

Mobile computing Without compromise

ENERGY STAR PARTNER

EarthSmart Computing™

Going Green with Wyse Cloud Client Computing™

Through our EarthSmart Computing initiative we are committed to helping organizations implement a greener computing strategy - one that delivers a more efficient and productive computing experience for your users with a positive effect on energy wastage, heat and carbon emissions.

Green Power

All Wyse X class mobile cloud clients pack a considerable punch with their green credentials. From reduced manufacturing impact and end-of-life recycling waste, to as little as 18 watts energy consumption, deploying Wyse X class mobile cloud clients to your mobile and remotely based workers will enable your organization to achieve a lighter carbon footprint.

Learn more

Download carbon calculators, fact sheets and white papers from here: **www.wyse.com/green**

Continue tour

Cloud PC Provisioning Wyse WSM

Enterprise computing from the cloud is here. Whatever you want. Wherever you need it.

That's the thinking behind Wyse WSM. It's a dynamic on-demand streamed computing environment where everyone gets their preferred operating systems, applications, user data and documents: Wherever they are and whenever they need them.

And Wyse WSM goes beyond the traditional VDI model too - with full support for mobile workers and remote branch offices. Wyse WSM effectively changes the rules on what's possible and opens up the benefits of high performance desktops to enterprise users: Wherever they are.

Better than a PC could ever be.

With Wyse WSM users - such as those in the financial or retail industries - are given a fresh computer with their chosen PC operating system, applications and files all preloaded and ready-to-go, every time they sit down and start-up their powerful desktop devices known as Wyse 'cloud PCs'.

Wyse cloud PCs feature powerful processors that enable them to run full PC operating systems and applications locally, while keeping their documents and data secure on central Wyse WSM servers. Enabling existing PC users to continue to use all their familiar operating systems and applications seamlessly - but with greater reliability and better overall performance than a full PC - with the result that many users don't even realize they're using a cloud PC.

And - better still, Wyse WSM features a highly secure, robust and resilient network design that's ideal for remote offices and mission critical deployments such as the defence industry.

With everything managed, updated, configured remotely and securely, Wyse WSM is everything a PC promises. Minus the headaches.

Continue tour

Approved final 101110.

Thin Client Management Wyse Device Manager

Wyse Device Manager (WDM) addresses key management requirements for deploying powerful thin clients. With its centralized management and administration WDM helps IT departments deliver more effective remote thin client support while minimizing end user downtime. Security is assured with HTTPS based imaging, updates and downloads.

WDM delivers organization-wide benefits:

Operations	Centralized management. Collect and organize asset information.
Administration	Health status reports. Automated client settings. Update client firmware and add applications.
End User IT Costs	Easier more effective remote support. Create custom scripts and packages.
Minimize downtime	Restart or reset thin clients in less than a minute. Enforce policies. Minimize user errors.

At a glance features:

Security	• HTTPS Based Imaging / Updates • Fully Encrypted Network Traffic • Delegated Admin Access (MS AD) Support
No-Hassle Deployment	• Complete Device Imaging / Patching / Updates • Bandwidth Throttling for Efficiency / Reliability • Software Updates and Add-ons
Device Administration and Monitoring	• Device Health Status / Reporting • Remote Shadowing / Control • Default Device Configuration
Scalability	• Distributed Architecture • Microsoft SQL Database Support • Multiple Remote Repository Support
Complete Asset Visibility	• Automated device discovery • Detailed Hardware Asset information • Installed Software Asset information.

Continue tour

Approved final 101110.

User Experience Optimization Wyse TCX™ Suite with Collaborative Processing Architecture™

Wyse TCX delivers an amazing user experience in one software suite.

Wyse TCX Suite of virtualization software enriches the user experience by removing the limitations previously associated with thin clients. It enhances, not replaces, key protocols like ICA/HDX and RDP by adding key features to make each more valuable.

Multi-display

Ensures application windows and dialog boxes are multi-monitor aware when using more than one monitor.

USB Virtualization

Enables plug and play peripheral support for virtual desktop environments.

- Redirect and use local USB devices in virtual desktops.
- Deploy virtual desktops to knowledge workers with special device access needs.
- Enable a broad set of USB peripherals including webcams and headsets.

Multimedia acceleration

Streamlines the delivery of video and audio content to the local client for a rich user experience within a thin client computing architecture.

- Accelerates Mpeg1, Mpeg2, WMV, Mpeg4 Part 2, AC3, AAC, MP3, WAV, WMA media types.
- Collaborative Processing Architecture enhances server scalability, and network utilization by off-loading multimedia rendering to the client.

Flash acceleration

Flash acceleration helps thin client users to experience improved Flash video performance. While the Flash player continues to run server-side, the resulting images are transcoded and redirected to the client for fast rendering. The technology allows for greater control of frame rate and compression and supports enhanced playback of YouTube-style flash videos in Internet Explorer.

Bi-directional sound

Enables bi-directional audio in virtual desktop environments, enabling solutions such as VOIP, digital dictation or voice recognition to be deployed.

Continue tour

Approved final 101110.

Virtualization Software Wyse Virtual Desktop Accelerator

Removing the barriers of network latency

Wyse Virtual Desktop Accelerator (VDA) enables virtualized desktop and thin computing environments to be deployed to areas where network latency has, to date, presented operational barriers. Now, with Wyse VDA, more users can receive the full benefits of Wyse thin computing – with the best PC experience over virtualized desktops.

Wyse VDA is a software-only solution for Wyse thin clients and supported PCs that delivers the best user experience for the allocated network bandwidth by neutralizing the effects of network latency and packet loss. Making 'thin' suitable for more remote-site, branch, or field-based users.

Wyse VDA works with instead of replacing existing RDP and ICA protocols, accelerating them by up to 20 times on networks faced with latencies up to and beyond 300ms, and at least 768kbps bandwidth.

At a glance features:

- Software-only acceleration of virtual desktops and applications
- Accelerates existing Citrix ICA and Microsoft RDP protocols
- Works on WANs and 'fat, long pipes'
- Accelerates connections to Citrix XenApp, Citrix XenDesktop, VMware View and Microsoft Terminal Server and Microsoft Hyper-V VDI
- Enhances Wyse TCX software suite functionality across wide-area networks
- Enables Wyse Collaborative Processing Architecture across wide-area networks
- Administrator console provides control of maximum bandwidth per connection
- Leverages built-in security of underlying protocols (128-bit encryption for RDP and ICA).

Continue tour

Generic WVDA approved final 010410

Operating Systems SUSE Linux Enterprise Thin Client

Wyse Enhanced SUSE Linux Enterprise Thin Client (SLETC) is a simple, secure, and easy to manage platform designed for customers looking for flexibility and support of the latest protocols (ICA, PCoIP, RDP, etc) without the need for a Windows-based thin client.

Thin-Linux for the Enterprise

Wyse Enhanced SLETC is not a 'home-brew' Linux. In fact, it's the industry's only enterprise-quality Linux platform, created by combining the security and flexibility of Novell's SUSE Linux with Wyse's cloud client computing leadership and innovation in user experience and simplified management. Additionally, SLETC is the only thin-Linux platform to protect customers from potential IP infringement suits as it is jointly indemnified by Novell and Microsoft.

Simple "Hands-Off" Management

Deploying, managing, and updating SLETC is easier than any other thin-Linux distribution, Period. Utilizing Wyse's proven automatic update and configuration approach, management tasks can be handled centrally and easily without any management software required.

Updating 1 or 1,000 thin clients is as simple as dragging and dropping a file into a folder. For customers that desire a little more hands-on approach (such as asset tracking, reporting, etc) then integration with Wyse Device Manager is built-in.

Security

Wyse Enhanced SLETC is designed with security in mind. IT Managers are able to provide a locked-down experience, smartcard login to virtual environments, VPN connectivity, and leverage a read-only file system that protects against data loss, theft and virus attacks.

Flexible, Multi-Protocol Support

Being built from a standard enterprise-quality Linux distribution means SLETC supports a wide range of protocols and infrastructures straight-out-of-the-box including Citrix, Microsoft, VMware and even your legacy applications (such as terminal emulations) - allowing you to mix-and-match connections from a single SLETC image.

That's Wyse Enhanced SUSE Linux Enterprise Thin Client

The only enterprise-quality Linux that's optimized for thin client computing.

Continue tour

Approved final 101110.

Operating Systems Microsoft Windows XP Embedded

Running Microsoft Windows XP Embedded on Wyse thin clients gives IT departments the ability to support Citrix ICA, Microsoft RDP and VMware View environments and deploy fully functional desktops with better manageability and significantly lower total cost of ownership than personal computers.

Wyse Enhanced Microsoft Windows XP Embedded-based thin clients can run 32 bit Microsoft Windows applications, either locally or from servers located on the network, with inbuilt flexibility to add and support a host of desktop peripherals with permission from the IT administrator.

Microsoft Windows xp Embedded

Secure write-protected thin desktops

This robust and flexible operating system is further enhanced by the Wyse file-based Write Filter that enables you to protect the file system image from accidental changes or user customization. On rebooting, the thin client simply returns to the required file system image state.

Wyse customized image support

Wyse technicians are able to help you customize Windows XP Embedded to your exact requirements and create bespoke system images for subsequent enterprise-wide deployment, management and update through Wyse Device Manager.

Contact your Wyse Partner for further details.

Continue tour

Generic MS XPE overview approved final 181209

Operating Systems Microsoft Windows Embedded Standard 2009

Running Windows Embedded Standard (WES) on Wyse thin clients gives IT departments the ability to deploy fully functional desktop clients with better manageability and significantly lower total cost of ownership than personal computers.

Wyse WES 2009-based thin clients can run 32 bit Microsoft Windows applications, either locally or from servers, with the inbuilt flexibility to add and support a host of desktop peripherals with permission from the IT administrator.

Full support is provided for RDP 7.0, Citrix ICA 11.2, VMware View 4.0.1 and Internet Explorer 8.

Secure write-protected thin client desktops

This robust and flexible operating system is further enhanced by the Wyse file-based Write Filter that enables you to protect the files, folder and/or entire volumes from accidental changes or user customization. On rebooting, the thin client simply returns to its original state thus preventing any possible damaging modification either from users or malware.

Wyse customized image support

Wyse technicians are prepared to help you customize Windows Embedded Standard 2009 to your exact requirements in order to create custom-built images for subsequent enterprise-wide deployment, management and update through Wyse Device Manager.

Contact your Wyse Partner for further details.

Continue tour

Approved final 101110.

Operating Systems Microsoft Windows Embedded Standard 7

New Windows Embedded Standard 7 (WES 7) delivers a wealth of enhanced deployment, user experience and management benefits to Wyse desktops, mobiles and thin clients deployed across an organization's virtualized network.

Richer user experience

Wherever they are - deskbound or mobile - with Microsoft Windows Embedded Standard 7 your users can benefit from the rich user experience of the Aero interface and the power, familiarity and reliability of the Windows 7 operating system in a highly customizable and componentized form.

Full support is provided for Remote Desktop Protocol (RDP) 7.0 to provide seamless connectivity to Windows Server 2008 R2 and virtual desktop infrastructure scenarios. The Wyse-enhanced WES7 platforms include additional features supporting the latest Citrix Online Plug-in and VMware View 4.5 to fit the needs of your most sophisticated users and making it an optimum OS for organizations wanting broad support for Cloud computing and desktop virtualization. Citrix Online Plug-in provides the HDX user experience and View 4.5 provides localization and Virtual Printing.

The platform also features additional Windows technology innovations to drive rich, immersive user experiences, including Internet Explorer 8.

There's full support and inbuilt flexibility too, to add and support a host of desktop peripherals with permission from the IT administrator.

Easier to manage and deploy

Now, with WES7, deploying 32-bit capable thin clients is easier and more manageable than ever before and reflects the direct working relationship between Wyse and Microsoft.

The support for Domain Join and group policies through Active Directory, along with support for management infrastructures like Microsoft System Center Configuration Manager (SCCM), help with management and integration of thin clients into existing desktop management infrastructures.

Wyse Device Manager (WDM) addresses key management requirements for deploying powerful thin clients. With its centralized management and administration, WDM helps IT departments deliver more effective remote thin client support while minimizing end user downtime. While to help IT and Customer Service staff, a simple USB imaging solutions, Wyse USB Firmware Tool, allows to quickly and easily manage image supported devices.

Enterprise-wide consistency

Wyse Embedded Standard 7 and Wyse provide the ideal, cost effective opportunity to deploy a consistent, high performance operating system across Wyse cloud clients.

Take the Tour again

Approved final 101110.

Contact Wyse

Wyse Technology Inc.
3471 North First Street, San Jose, CA 95134-1801

Visit our website at:
http://www.wyse.com or send an email to: sales@wyse.com

Wyse Sales
800 GET WYSE (800 438 9973)
International customers please dial:
00 1 408 473 1200

Wyse Customer Service Center:
800 800 WYSE (800 800 9973)

Wyse offers cloud client computing sales, service and support expertise around the globe.

Click here for contact details of your regional Wyse office.

©2010 The Wyse logo and Wyse are trademarks of Wyse Technology Inc. Other product names mentioned herein are for identification purposes only and may be trademarks and/or registered trademarks of their respective companies. All specifications are subject to change without notice. Whilst we make every effort to ensure the accuracy of the details, specifications, models, images and benefits featured in this datasheet, we cannot be held responsible for any errors and/or omissions. If you have any queries regarding Wyse products please contact your authorized regional Wyse Partner or representative for further information and assistance. Some features require support by server operating system and protocol. Approved final 151110.

Technical Wyse X class Specifications

Wyse X00c, X50c, X90cw and X90c7

Wyse X50L, X90L, X90Le X90LW and X90LeW

The Wyse X class family comprises high performance mobile cloud clients, featuring Wyse Enhanced SUSE Linux Enterprise, Microsoft Windows XP Embedded, Windows Embedded Standard 2009, Windows Embedded Standard 7 operating systems and Wyse WSM.

Wyse Enhanced SUSE Linux

Novell

Microsoft Windows XP Embedded

Microsoft Windows xp Embedded

Microsoft Windows Embedded Standard 2009

Windows Embedded Standard 2009

Microsoft Windows Embedded Standard 7

Windows Embedded Standard 7

Wyse WSM

Wyse WSM

Learn more. Simply click these data sheet icons

Visit: wyse.com

Wyse X class C Family Specifications: Wyse X50c, X90cw and X90c7 mobile thin clients and X00c mobile cloud PC

Hardware specifications

Processors	Intel Atom Z520 1.33GHz
Memory	X50C: Wyse Enhanced SUSE Linux: 1GB Flash / 1GB RAM X90CW: Windows Embedded Standard 2009: 2GB Flash / 1GB RAM and up to 4GB Flash / 2GB RAM X90C7: Windows Embedded Standard 7: 4GB Flash / 2GB RAM X00C for WSM: 160GB HDD / 2GB RAM
I/O peripheral support	One VGA port 15-pin D-sub for external monitor Three USB 2.0 ports Media slot 4-in-1 (MS/MS-Pro/SD/MMC) for additional storage One Mic In One Line Out Built-in 1.3 M Pixel Camera and Microphone* 3G capable
Keyboard	US, US international, UK, French, German
Pointing Device	Touchpad
Networking	10/100Base-T Fast Ethernet (RJ-45) Integrated wireless 802.11 b/g/n
Factory options	Bluetooth for connection to selected mobile phones*
Display	11.6" WXGA 1366 x 768 LED backlight
Audio	Output: 1/8-inch mini jack, full 16 bit stereo Input: 1/8-inch mini jack, 8 bit microphone
Speakers	2 internal stereo speakers

Physical characteristics	Width: 11.42 inches (290mm) Depth: 8.23 inches (209mm)) Height: 1.39-1.25 inches (26.4~31.7mm)
Weight	3.2 lbs. (1.45kg) with battery
Device Security	Built-in Kensington security slot (cable sold separately)
Battery	6-cell Li-Ion battery (5200mAh) Up to 8 hours autonomy
Power	Worldwide auto-sensing 100-240 VAC, 50/60 Hz. Energy Star V.5.0 compliant power supply Average power usage with under 15 Watts. 19V/65W AC Adapter
Temperature Range	50° to 104° F (10° to 40° C)
Humidity	20% to 80% condensing 10% to 95% non-condensing
Safety certifications	Safety: UL/IEC 60950-1, TUV EMC: CE (EN 55022, EN 55024), FCC 15B) Wireless: FCC (Part 15C), CE (EN 300 328, EN 301 489), Directive 1999/5/EC Environment: RoHS, WEEE
Warranty	One-year limited warranty, 6 months battery warranty. Visit our web site for WyseChoice extensions and upgrades.

* Camera and bluetooth option are currently not supported on X50c.

Generic X class C Family Spec approved final 151110.

Wyse X class L Family Specifications: Wyse X50L, X90L, X90Le, X90LW and X90LeW mobile thin clients

Hardware specifications

Processor	VIA C7-M ULV 1.2GHz
Memory	X50L: Wyse Enhanced SUSE Linux: 1GB Flash / 1 GB RAM X90L / X90Le: Windows XP Embedded: 1GB Flash / 1 GB RAM X90LW / X90LeW: Windows Embedded Standard 2009: 2GB Flash / 1GB RAM
I/O peripheral support	4 USB 2.0 ports (3 left/1 right) 1 VGA port 15-pin D-Sub for external monitor (clone mode) 1 DVI-D port for external monitor (clone mode) SD card slot for additional storage 1 Express 34/54 slot (PCI-E based for additional performance)
Networking	10/100/1000 Base-T fast Ethernet (RJ-45) Integrated Wireless 802.11b/g/n
Display	15.4" Widescreen WXGA TFT LCD 1280x800
Audio	Line Out for external speakers Mic In for external microphone High definition audio
Speakers	2 internal stereo speakers
X90Le and X90LeW includes	Internal Smart Card reader / Citrix Password Manager Bluetooth for connection to selected mobile phones

Physical characteristics	Width 14.12" (360 mm) Depth 10.23" (260 mm) Height 1.5" (39.7mm) Weight - 5.6lbs (2.5Kgs) with 6 cell battery
Battery	Standard 6 cell battery Optional 9 cell battery available Energy consumption: 18 watts
Security	Kensington Lock slot
Keyboard and mouse	Keyboard Touchpad
Keyboard layouts supported	French, German, Italian, Norwegian, Spanish, Swedish, UK, US, US international
Warranty	1 year limited warranty 6 month battery warranty
Safety Certifications	cUL (UL/EN 60950-1), TUV (EK1-ITB 2000) EMC:CE (EN 55022, EN 55024), FCC (Part 15B)
Wireless:	FCC (Part 15C), CE (EN 330 328, EN 301 489) Declaration of Notification (Directive 1999/5/EC)
Environment:	RoHS, WEEE

Generic X class L Family Spec approved final 151110.

SUSE Linux Enterprise Thin Client Software specifications

Firmware features	SUSE Linux Enterprise Thin Client 11 Automatic Central Configuration (text-based INI's) Automatic Upgrades (FTP, HTTP, HTTPS) Secure, read-only file system with lockdown abilities RDESKTOP 1.6 client Citrix Online Plugin 11.2 client (ICA 11.2) w/ HDX Mediastream, Plug-n-Play, Realtime, etc. VMware View 4.0 client Ericom PowerTerm® Terminal Emulation Cisco, Juniper, Nortel, IPSEC VPN Support (Add-ons) Local/Remote Printing support (CUPS, LPR/LPD, Samba, ThinPrint,etc) Web-based applications (Firefox, Flash, JAVA,etc) XDMCP SSH
Server OS Compatibility/Support	Citrix XenApp / Citrix Presentation Server Citrix XenDesktop VMware View Microsoft Windows Terminal Server 2003 & 2008
Keyboard language support	100+ Keyboard Layouts supported locally (English, German, Spanish, French, Italian, Dutch, Chinese, Japanese, Turkish)

Management made easy	Automatic, "hands-off" configuration and upgrading of thin clients without the need for device management software. Optionally, administrators can choose to integrate with Wyse Device Manager (WDM) for more hands-on control: - Complete image upgrade - Wake terminal remotely (Wake-on LAN) - Remote screen shadowing of entire desktop (VNC) - Asset management and reporting
Wireless support	WPA Personal, WPA2 Personal, WPA Enterprise, WPA Enterprise Authentication support PEAP/TLS: PAP/MSCHAP/MSCHAPV2 support
Wyse TCX Suite	Advanced support for innovative Wyse TCX Suite of virtualization software that both works with and enhances ICA and RDP (instead of replacing them) featuring: • Multimedia acceleration - the power to run rich multimedia files formats utilizing Wyse Collaborative Processing Architecture (CPA) that intelligently redirects the necessary processing tasks between the thin client and the server. • Multi-display - ensures that windows and dialogue boxes behave the way users expect when using more than one monitor. • USB Virtualization - makes thin client-attached USB devices visible to virtual desktops and applications, with full IT control. • Bi-directional sound - enables virtual desktops and applications to receive and transmit high quality audio without compromise. • Flash acceleration - helps users of thin clients to experience improved Flash performance.
Wyse Virtual Desktop Accelerator	Wyse Virtual Desktop Accelerator Delivers the best user experience for the allocated network bandwidth. Wyse Virtual Desktop Accelerator neutralizes the effects of network latency and packet loss, making cloud client computing more suitable for more remote-site, branch, or field-based users - and boosts RDP and ICA up to 20 times on networks with latencies up to and exceeding 300ms and at least 768kbps bandwidth.

Approved final 101110.

Microsoft Windows XP Embedded SP3 Software specifications

Firmware features	Microsoft Windows XP Embedded SP3 Microsoft Internet Explorer 7.0 resident: HTML, JavaScript, XML, Active X Sun JRE, Media Player, Citrix Web Interface RDP 6.0.xx resident Citrix ICA 11 resident VMware View Client Resident Ericom PowerTerm® Terminal Emulation provides 30-plus terminal emulations Windows Media Player 11, .NET 3.0 SP1
Memory	1GB of flash memory and 1GB of RAM
Server OS Infrastructure Support	Citrix XenApp / Citrix Presentation Server Citrix XenDesktop VMware View Microsoft Windows Terminal Server 2003 & 2008
Set-up and Configuration	Boot from local flash Microsoft Windows XP user interface languages: U.S. English, French, German, Spanish, Optional add-ons
Keyboard language support	U.S. English (standard), French, German, Spanish, U.K. English, 40 other languages included
Protocol Support	TCP/IP, DNS, DHCP, PXE
Management	Remote management, configuration, and upgrades through Wyse Device Manager Complete image upgrade Wake terminal remotely (Wake-on LAN) Terminal configuration (IP information, name, etc.) Remote screen shadowing of entire desktop (Wyse Remote Shadow) Reporting, Asset management SMS Altiris
Wireless support	802.11 b/g/n support with internal wireless adapter WPA-2, WEP, WPA wireless authentication Supports wireless adapters from: Cisco, D-Link, Netgear, US Robotics, Trendware
Plug-ins	Adobe Flash Player Adobe Shockwave
Wyse TCX Suite	Advanced support for innovative Wyse TCX Suite virtualization software that both works with *and enhances* ICA and RDP (instead of replacing them) featuring: • Wyse TCX Multimedia - the power to run rich multimedia files formats ultilizing Wyse Collaborative Processing Architecture (CPA) that intelligently redirects the necessary processing tasks between the client and the server. • Wyse TCX Multi-Display - ensures that windows and dialogue boxes behave the way users expect when using more than one monitor. • Wyse TCX USB Virtualizer - makes client attached USB devices visible to virtual desktops and applications, with full IT control. • Wyse TCX Rich Sound - enables virtual desktops and applications to receive and transmit high quality audio without compromise. • Wyse TCX Flash Acceleration - helps users of thin clients to experience improved Flash performance.

Generic WXPE Spec approved final 100410

Microsoft Windows Embedded Standard 2009 Software specifications

Firmware features	Microsoft Windows Embedded Standard 2009 Microsoft Internet Explorer 8.0 resident: HTML, JavaScript, XML, Active X Sun JRE, Media Player, Citrix Web Interface RDP 7.0 resident Citrix Online Plugin 11.2 resident (ICA 11.2) VMware View 4.0.1 client resident Ericom PowerTerm® Terminal Emulation provides 30-plus terminal emulations Windows Media Player 11, .NET 3.5
Server OS Infrastructure Support	Citrix XenApp / Citrix Presentation Server Citrix XenDesktop VMware View Microsoft Windows Terminal Server 2003 & 2008
Application Framework	.Net 3.5
Security	File Based Write Filter (FBWF) Microsoft Baseline Security Analyzer (MBSA)
Set-up and Configuration	Boot from local flash Microsoft Windows WES user interface languages: U.S. English, French, German, Spanish, Optional add-ons
Keyboard language support	U.S. English (standard), French, German, Spanish, U.K. English, 40 other languages included
Protocol Support	TCP/IP, DNS, DHCP, PXE
Management	Remote management, configuration, and upgrades through Wyse Device Manager Complete image upgrade Wake terminal remotely (Wake-on LAN) Terminal configuration (IP information, name, etc.) Remote screen shadowing of entire desktop (Wyse Remote Shadow) Reporting, Asset management SMS Altiris
Wireless support	802.11 b/g/n support with external wireless adapter or internal wireless adapter option WPA-2, WEP, WPA wireless authentication PEAP-GTC wireless authentication protocol with optional Juniper Odyssey Client Supports PC-Card wireless adapters from: Cisco, D-Link, Netgear, US Robotics, Trendware
Plug-ins	Adobe Flash Player Adobe Shockwave Microsoft Silverlight
Wyse TCX Suite	Advanced support for innovative Wyse TCX Suite of virtualization software that both works with *and enhances* ICA and RDP (instead of replacing them) featuring: • Multimedia acceleration - the power to run rich multimedia files formats ultilizing Wyse Collaborative Processing Architecture (CPA) that intelligently redirects the necessary processing tasks between the thin client and the server. • Multi-display - ensures that windows and dialogue boxes behave the way users expect when using more than one monitor. • USB Virtualization - makes thin client-attached USB devices visible to virtual desktops and applications, with full IT control. • Bi-directional sound - enables virtual desktops and applications to receive and transmit high quality audio without compromise. • Flash acceleration - helps users of thin clients to experience improved Flash performance.

Approved final 101110.

Microsoft Windows Embedded Standard 7 Software specifications

Firmware features	Microsoft Windows Embedded Standard 7 (WES7) Microsoft Internet Explorer 8.0 resident: HTML, JavaScript, XML, Citrix Web Interface RDP 7.0 resident Citrix Online Plugin 11.2 resident (ICA 11.2) Citrix XenDesktop VMware View 4.0.1 client resident (VMware View 4.5 supported) Ericom PowerTerm® Terminal Emulation provides 30-plus terminal emulations Windows Media Player 12
Server OS Infrastructure Support	Citrix XenApp / Citrix Presentation Server Citrix XenDesktop VMware View Microsoft Windows Terminal Server 2003 & 2008 R2
Security	File Based Write Filter (FBWF)
Set-up and Configuration	Boot from local flash Microsoft Windows WES7 user interface languages: U.S, Optional add-ons
Keyboard language support	U.S. English (standard), French, German, Spanish, U.K. English, 40 other languages included
Protocol Support	TCP/IP, DNS, DHCP, PXE
Management	Remote management, configuration, and upgrades through Wyse Device Manager Complete image upgrade Terminal configuration (IP information, name, etc.) Reporting, Asset management SCCM Simple USB imaging solution with Wyse USB Firmware Tool

Wireless support	802.11 b/g/n support with external wireless adapter or internal wireless adapter option WPA-2, WEP, WPA wireless authentication PEAP-GTC wireless authentication protocol with optional Juniper Odyssey Client Supports PC-Card wireless adapters from: Cisco, D-Link, Netgear, US Robotics, Trendware
Plug-ins	Adobe Flash Player Microsoft Silverlight
Wyse TCX Suite	Advanced support for innovative Wyse TCX Suite virtualization software that both works with and enhances ICA and RDP (instead of replacing them) featuring: • Multimedia acceleration - the power to run rich multimedia files formats ultilizing Wyse Collaborative Processing Architecture (CPA) that intelligently redirects the necessary processing tasks between the thin client and the server. • Multi-display - ensures that windows and dialogue boxes behave the way users expect when using more than one monitor. • USB Virtualization - makes thin client-attached USB devices visible to virtual desktops and applications, with full IT control. • Bi-directional sound - enables virtual desktops and applications to receive and transmit high quality audio without compromise. • Flash acceleration - helps users of thin clients to experience improved Flash performance.

Approved final 101110.

Wyse WSM Software Specifications

Device Hardware Requirements	Windows XP Pro • Minimum processor speed 800 MHz (1GHz or higher is recommended) • Mind. 256 MB (1GB or higher is recommended) Vista and Windows 7 • Minimum processor speed 1 GHz (1.5GHz or higher is recommended) • Mind. 1 GB (2GB or higher is recommended)	• Flash size/local storage – none needed. If the device has flash it can be used as a local cache for offline mode.
Server Requirements	• Minimum processor speed 1GHz (3GHz or higher is recommended).	• Server Operating System: Windows XP Pro SP3, Windows Server 2003, Windows Server 2008 and 2008 R2
Network Requirements	• Server Lan Speed = Minimum 100Mbps (1Gbps and up is recommended). • Device Lan Speed = Minimum 10Mbps (100 Mbps full duplex is recommended)	
Operating Systems Supported	• Microsoft Windows XP • Microsoft Windows Vista. • Microsoft Windows 7.	
Databases supported	• Microsoft SQL 2005 and 2008 (Server and Express Editions).	
Built-in high Availability	• Database availability using SQL clustering. • Built-in server high availability through WSM Server Grouping feature. • Server to Server Fail-over Capability.	
Fast and Easy Installation	• Installing Wyse WSM is simply a matter of running a single, graphical installer.	• The installer checks for all the prerequisite components before installation.
Web-based Admin Console	• Allows IT administrators to access Wyse WSM from any browser. • Control the entire installation from a central location.	• Dramatically simplifies administration, saving IT time and user downtime. • Wizards to guide the user through specific tasks.
Operation System and Application Imaging Tools	• Imaging tool simplifies the process of creating an OS image for the specific hardware configuration and an application image for all hardware configurations.	• All OS and application images are ready for deployment once created, no further modifications needed.
Application Subscription Management	• Use flexible application deployment methods: - Auto-subscribed applications are ready for use when user logs in for the first time. - Manual subscriptions allow users the flexibility to use applications only when needed. - Mandatory subscriptions that cannot be unsubscribed by users.	
Protected System Drive	• Allows administrators to protect the system drive from enduser initiated updates.	• Prevents changes to operating system drive except by administrators, helping stop viruses, spyware, or malware from infecting the device.

Approved final 101110.

Wyse WSM Software Specifications continued

Operating System Streaming	• Wyse WSM provides an on-demand operating system to Wyse cloud PCs or diskless PCs on the network. • Only those bits needed for the normal device operation are sent in order to reduce network traffic.	• Innovative technology makes each Wyse cloud PC or diskless PC think there is a virtual hard disk attached to the device. • Operating-system images can be shared across multiple devices, making management easier.
Flexible Boot Options	• Each device can boot from four operating system image assignments. • Administrators can assign or let users choose which operating system they want to boot.	• First disk mode for the default OS image to boot from every time device starts up. • First available mode to boot from the first responding server in order to balance loads.
Application License Management and Metering	• Wyse WSM provides the infrastructure to collect information about the application license-usage across the enterprise. This information allows IT organizations to save money associated with application licenses.	• Licenses can be stored for all the applications deployed. It also enforces license compliance. • Types of licenses that can be controlled include: - Time-based licenses (valid for X days). - Number of concurrent users.
Modes of Operation	Wyse WSM allows administrators to choose modes of operation for the operating system: - **Private Mode** – for administration of operating system images.	- **Shared Mode** – has two additional modes of normal operation: - *Volatile* – returns desktop to pristine state after a device reboot. - *Persistent* – remembers any user settings after a device reboot.
Remote Servers for Scalability	• IT administrators can deploy multiple remote servers to improve scalability of the overall solution.	• Central management of remote servers allows easy deployment of the solution across different geographic locations.
Comprehensive Reporting	• Easy ad-hoc reporting based on flexible parameters. • Reports are delivered through HTML, giving you the flexibility to output in any form.	• License-metering reports can be used to make proactive purchasing decisions. • License-audit reports can be used for compliance purposes.
Desktop Compatibility	• Wyse WSM works with Wyse C00LE, V00LE, R00L/E and X00C/L family cloud PCs as well as with existing thin clients, diskless PCs and virtual-desktop systems.	

Approved final 101110.

Wyse X class C Family mobile cloud clients

Thin. Compact. Secure.
Summary Data

Wyse compact mobile cloud clients

Secure mobile computing. Without compromise.

With the compact Wyse X class C Family mobile cloud clients, you can take the benefits of Wyse cloud client computing with you wherever you go. Deploying secure, accessible and manageable laptops has never been easier - as dependant on the model - user data is either stored on central servers or locally on a HDD for offline working.

Powered by Intel Atom Z520 1.33 GHz processors these compact, high performance mobile cloud clients allow more users than ever before to gain secure access to corporate networks when and wherever they need to.

They're optimized for Citrix XenApp, Citrix XenDesktop, Microsoft Terminal Server and VMware View environments - and are available across a range of operating systems: Wyse Enhanced SUSE Linux Enterprise, Microsoft Windows XP Embedded, Windows Embedded Standard 2009 & 7 and Wyse WSM.

Compact high performance mobile cloud clients.

Wyse X class C Family mobile cloud clients are packed with features that would put some fat-laptops to shame. Busy mobile workers and traditional 'road-warriors' alike will appreciate their compact slim profile, light weight, crisp LED-backlit display and long-lasting 8 hour battery.

Features

Performance

New generation Intel Atom Z520 1.33GHz processor delivering high performance with low power requirements (15 watts).

Ultra-mobile

Slim, compact design weighing just 3.2lb that's ideal for busy mobile workers and classic 'road-warriors' alike.

Rich user connectivity

Buit-in webcam*, integrated wireless b/g/n, Buetooth 2.1* and support for 3G cards provide everything needed for rich user interactivity, flexible connectvity and secure mobile access.

Green

Draws under 15 watts of power. Small form-factor reduces the impact of manufacturing and end-of-life disposal on the environment.

Virtualization

Users benefit from built-in support for the Wyse TCX Suite of user experience optimizations created to deliver the best user experience over virtualized desktop environments.

Management

Features Wyse Device Manager (workgroup edition).

Wyse Enhanced SUSE Linux

Secure, Flexible and market-leading Linux combined with Wyse innovations in management and user experience.

OS and Application Provisioning

Full integration with Wyse WSM cloud PC provisioning software with the X00c.

Microsoft Windows Embedded Standard 2009 and 7

Take advantage of the power of Windows Embedded Standard 2009 and the rich user experience of Windows Embedded Standard 7.

Call Wyse: 1-800-GET-WYSE www.wyse.com

Wyse X class C Family mobile cloud clients

Hardware specifications

Processors	Intel Atom Z520 1.33GHz
Memory	X50c: Wyse Enhanced SUSE Linux: 1GB Flash / 1GB RAM X90cW: Windows Embedded Standard 2009: 2GB Flash / 1GB RAM and up to 4GB Flash / 2GB RAM X90c7: Windows Embedded Standard 7: 4GB Flash / 2GB RAM X00c for WSM: 160GB HDD / 2GB RAM
I/O peripheral support	One VGA port 15-pin D-sub for external monitor Three USB 2.0 ports Media slot 4-in-1 (MS/MS-Pro/SD/MMC) for additional storage One Mic In One Line Out Built-in 1.3 M Pixel Camera and Microphone* 3G capable
Keyboard	US, US international, UK, French, German
Pointing Device	Touchpad
Networking	10/100Base-T Fast Ethernet (RJ-45) Integrated wireless 802.11 b/g/n
Factory options	Bluetooth for connection to selected mobile phones*
Display	11.6" WXGA 1366 x 768 LED backlight
Audio	Output: 1/8-inch mini jack, full 16 bit stereo Input: 1/8-inch mini jack, 8 bit microphone
Speakers	2 internal stereo speakers
Physical characteristics	Width: 11.42 inches (290mm) Depth: 8.23 inches (209mm)) Height: 1.39-1.25 inches (26.4~31.7mm)
Weight	3.2 lbs. (1.45kg) with battery
Device Security	Built-in Kensington security slot (cable sold separately)
Battery	6-cell Li-Ion battery (5200mAh) Up to 8 hours autonomy
Power	Worldwide auto-sensing 100-240 VAC, 50/60 Hz. Energy Star V.5.0 compliant power supply Average power usage with under 15 Watts. 19V/65W AC Adapter
Temperature Range	50° to 104° F (10° to 40° C)
Humidity	20% to 80% condensing 10% to 95% non-condensing
Safety certifications	Safety: UL/IEC 60950-1, TUV EMC: CE (EN 55022, EN 55024), FCC 15B) Wireless: FCC (Part 15C), CE (EN 300 328, EN 301 489), Directive 1999/5/EC Environment: RoHS, WEEE
Warranty	One-year limited warranty, 6 months battery warranty. Visit our web site for WyseChoice extensions and upgrades.

* Camera and bluetooth option are currently not supported on X50c.

Generic X class C Family Spec / Approved final 101110

Wyse Technology Inc.
3471 North First Street
San Jose, CA 95134-1801

Visit our website at:
http://www.wyse.com

Or send email to:
sales@wyse.com

Wyse Sales
800 GET WYSE
(800 438 9973)
+ 1 408-473-1200

Wyse Customer Service Center:
800 800 WYSE
(800 800 9973)

©2010 The Wyse logo and Wyse are trademarks of Wyse Technology Inc. Other product names mentioned herein are for identification purposes only and may be trademarks and/or registered trademarks of their respective companies. All specifications are subject to change without notice. Whilst we make every effort to ensure the accuracy of the details, specifications, models, images and benefits featured in this datasheet, we cannot be held responsible for any errors and/or omissions. If you have any queries regarding Wyse products please contact your authorized regional Wyse Partner or representative for further information and assistance. Some features require support by server operating system and protocol. Approved final 101110.

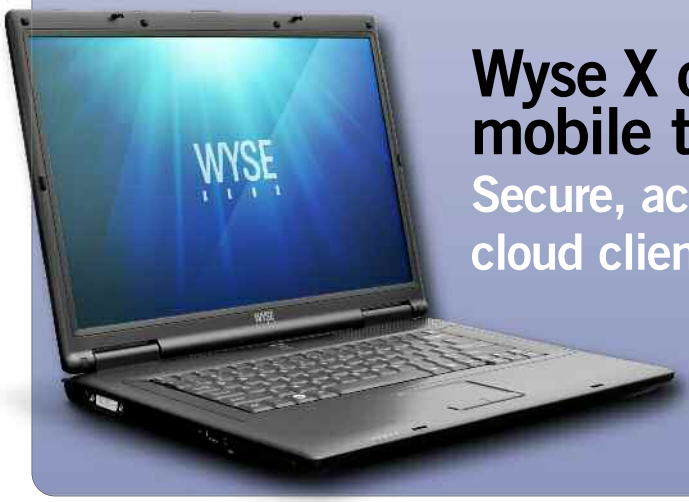

Wyse X class L Family mobile thin clients

Secure, accessible mobile cloud client computing.

Summary Data

Wyse X class mobile thin clients

Secure computing. Wherever you need it.

Wyse X class L Family mobile thin clients feature all the benefits of other Wyse cloud clients in the range - such as no hard drives - of particular benefit to the ever-increasing exposure of sensitive data to insecure environments by mobile workers. As all data stored and accessed via the server, the risk of data-loss through stolen or mislaid laptops is eliminated.

High performance on the move.

Wyse X class mobile thin clients feature high-performance energy conserving Via C7-M ULV processors, giving your mobile users all the processing power and flexibility they need including rich multimedia playback. 15.4" widescreen displays contribute to delivering excellent performance for graphics applications and multimedia presentations.

No fans. No hard drives. No worries.

Their fanless, hard drive-free design means no moving parts and a far longer lifespan than other comparative PC laptops. And of course no hard drive means no data whatsoever is lost or compromised if they're stolen or mislaid. Finally, Wyse X class mobile thin clients pack all these features and functionality into a slim robust design, ideal for today's hard working and pressurized mobile workers.

Choice of operating systems.

Linux environments are catered for with Wyse Enhanced SUSE Linux Enterprise. Windows environments are supported with Microsoft Windows XP Embedded and Windows Embedded Standard 2009.

Features

Performance
Featuring 1.2Ghz VIA C7-M ULV processors specifically designed for excellent mobile computing and graphics.

Connectivity
The Wyse X class family features: Gigabit ethernet networking; secure wireless connectivity; support Smart Cards and VGA or DVI ports for secondary displays as well as a host of USB and audio ports.

Green
Just 18 watts energy consumption.

Management
Featuring Wyse Device Manager (work group edition) with every Wyse X class thin client.

Virtualization
Wyse X class mobile thin clients can be enhanced by the Wyse TCX Suite of user experience optimizations.

Wyse Linux
Wyse Enhanced SUSE Linux Enterprise is the 'Safe Linux' indemnified jointly by Novell and Microsoft.

Windows XP Embedded
Deploy fully functional desktop computers, with better manageability with the ability to create bespoke system images.

Windows Embedded Standard 2009
The most advancd embedded operating systems from Microsoft.

Call Wyse: 1-800-GET-WYSE www.wyse.com

Wyse X class L Family thin clients Hardware specifications

Wyse X50L, X90L, X90Le, X90LW and X90LeW mobile thin clients

Processor	VIA C7-M ULV 1.2GHz
Memory	X50L: Wyse Enhanced SUSE Linux: 1GB Flash / 1 GB RAM X90L / X90Le: Windows XP Embedded: 1GB Flash / 1 GB RAM X90LW / X90LeW: Windows Embedded Standard 2009: 2GB Flash / 1GB RAM
I/O peripheral support	4 USB 2.0 ports (3 left/1 right) 1 VGA port 15-pin D-Sub for external monitor (clone mode) 1 DVI-D port for external monitor (clone mode) SD card slot for additional storage 1 Express 34/54 slot (PCI-E based for additional performance)
Networking	10/100/1000 Base-T fast Ethernet (RJ-45) Integrated Wireless 802.11b/g/n
Display	15.4" Widescreen WXGA TFT LCD 1280x800
Audio	Line Out for external speakers Mic In for external microphone High definition audio
Speakers	2 internal stereo speakers
X90Le and X90LeW includes	Internal Smart Card reader / Citrix Password Manager Bluetooth for connection to selected mobile phones
Physical characteristics	Width 14.12" (360 mm) Depth 10.23" (260 mm) Height 1.5" (39.7mm) Weight - 5.6lbs (2.5Kgs) with 6 cell battery
Battery	Standard 6 cell battery Optional 9 cell battery available Energy consumption: 18 watts
Security	Kensington Lock slot
Keyboard and mouse	Keyboard Touchpad
Keyboard layouts supported	French, German, Italian, Norwegian, Spanish, Swedish, UK, US, US international
Warranty	1 year limited warranty 6 month battery warranty
Safety Certifications	cUL (UL/EN 60950-1), TUV (EK1-ITB 2000) EMC:CE (EN 55022, EN 55024), FCC (Part 15B) Wireless: FCC (Part 15C), CE (EN 330 328, EN 301 4089) Declaration of Notification (Directive 1999/5/EC) Environment: RoHS, WEEE

Wyse Technology Inc.
3471 North First Street
San Jose, CA 95134-1801

Visit our website at:
http://www.wyse.com

Or send email to:
sales@wyse.com

Wyse Sales
800 GET WYSE
(800 438 9973)
+ 1 408-473-1200

Wyse Customer Service Center:
800 800 WYSE
(800 800 9973)

©2010 The Wyse logo and Wyse are trademarks of Wyse Technology Inc. Other product names mentioned herein are for identification purposes only and may be trademarks and/or registered trademarks of their respective companies. All specifications are subject to change without notice. Whilst we make every effort to ensure the accuracy of the details, specifications, models, images and benefits featured in this datasheet, we cannot be held responsible for any errors and/or omissions. If you have any queries regarding Wyse products please contact your authorized regional Wyse Partner or representative for further information and assistance. Some features require support by server operating system and protocol. Approved final 101110.